


NTG-1

Directional Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

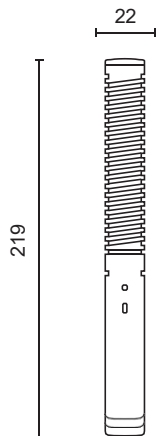

Incl. Accessories

- WSVM wind shield
- ZP1 zip pouch
- RM5 micclip


Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- Low handling noise
- Low weight - 105g (3 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty with online registration


Specifications

Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF@80Hz)
Sensitivity	-36dB \pm 2dB re 1V/Pa @ 1kHz
Nominal Impedence	50 Ω
Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k Ω)
Dynamic Range	121dB (per IEC651)
Maximum SPL	139dB(@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	76dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power
Dimensions	Length - 219mm Diameter - 22mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Net Weight	105g

Polar Pattern



Frequency Response

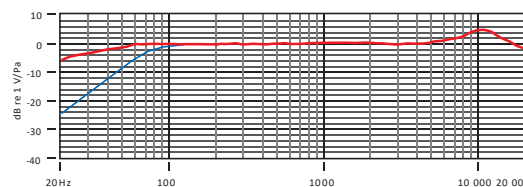

RØDE
MICROPHONES

Features 特点

- Broadcast sound quality 广播级音质
- Low noise circuitry 低噪音电路
- Condenser transducer 电容传感器
- Rugged metal construction 坚固的金属结构
- Two step High Pass Filter (Flat/80Hz) 两段高通滤波器（平坦/ 80Hz）
- Low handling noise 低处理噪音
- Low weight - 105g (3 oz.) 重量轻 - 105克（3盎司）
- Designed and manufactured in Australia 在澳大利亚设计和制造
- Full 10 year warranty with online registration 通过 www.rodemic.com/warranty 在线注册获得整10年的完整保修

Specifications 规格

Acoustic Principle 声学原理	Line Gradient 线条渐变
Directional Pattern 指向性模式	Super-Cardio 超心型拾音模式
Frequency Range 频率范围	20Hz ~ 20,000Hz (delectable HPF@80Hz)
Sensitivity 敏感度	-36dB \pm 2dB re 1V/Pa @ 1kHz
Nominal Impedance 额定阻抗	50 Ω
Equivalent Noise 等效噪音	18dBA SPL (A - weighted per IEC651)
Maximum Output 最大输出	+6.9dBu (@ 1% THD into 1k Ω)
Dynamic Range 动态范围	121dB (per IEC651)
Maximum SPL 最大声压级	139dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise 信号/噪声	76dB SPL (A - weighted per IEC651)
Power Req. 功率要求	48V Phantom Power 幻想电源
Dimensions 尺寸	Length 长度- 219mm Diameter 直径 - 22mm
Output Connection 输出连接	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Net Weight 净重	105g